


- Notes:
1. Vertical spacing between all pavers and the slab shall be no greater than 1/4 " [typical 1/8"] and filled with fine washed sand.
 2. Slab surface shall be sloped two sides approx 1:100 fall from the center.
 3. Refer to Retaining Wall and Paver installation drawings for slab and footer details
 4. As an option to Aggregate fill Installation of a drain system such as shown in Detail A.
 5. Pavers are initially to be laid in without adhesion to the slab. Over time after engraving pavers will be cemented in.

Stage Surface Cutaway View with and Without Pavers Installed

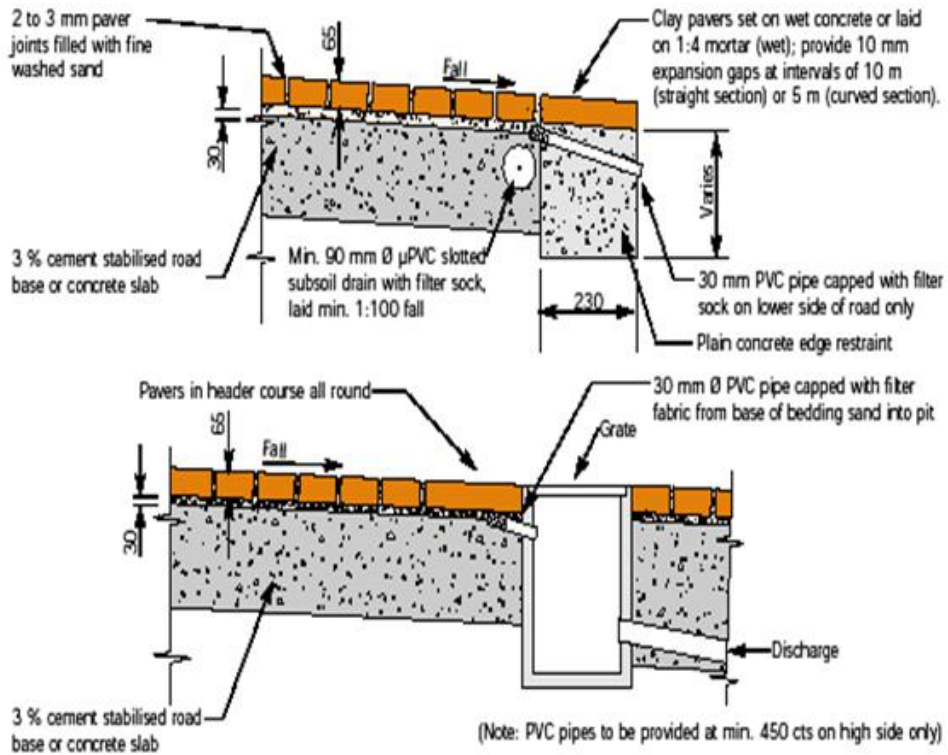

Detail A. Optional drainage systems